

# AN-130 Speaker Monitor

Portable Speaker Monitor Specifications

## Advancing Technology

The Anchor Audio AN-130 speaker monitor is a light-weight, easy to use system that fills the room with your voice, with the wireless microphone you're free to move around the room. The AN-130 is ideal for use with a video projector, PC or CD/DVD player. Who uses the AN-130? Teachers, corporate presenters, anyone that needs to reach groups of one to one hundred.



## AN-130 FEATURES

### 6-YEAR WARRANTY!

REACH CROWDS OF 100+

101 DB OF CLEAR SOUND

16 CHANNEL UHF DIVERSITY WIRELESS  
BY ANCHOR AUDIO

BASS & TREBLE CONTROLS

30 WATT AMPLIFIER EQUALS LOTS OF SOUND

CARBON FIBER CONE

MAGNETICALLY SHIELDED SPEAKER FOR AV USE

INPUT JACKS: RCA LINE-IN, 1/4" LINE-IN  
& 1/4" MIC-IN

1/4" LINE-OUT JACK - DAISY CHAIN MULTIPLE  
SYSTEMS OR RECORD OUTPUT

REMOTE CONTROL FOR VOLUME & MUTE

DURABLE INJECTION-MOLDED  
POLYPROPYLENE CASE

WEIGHS JUST 8.5 POUNDS

## AN-130 MODELS

AN-130 Speaker monitor / white

AN-130BK Speaker monitor / black

AN-130U1 1 built-in wireless receiver / white

AN-130U1BK 1 built-in wireless receiver / black

AN-130RC Remote control / white

AN-130RCBK Remote control / black

## MADE IN THE USA!

## AN-130 ACCESSORIES

REMOTE-130 Infrared remote control

MIC-90P Professional dynamic, cardioid pattern handheld microphone

CC-100 Speaker/accessory bag

CC-100XL Speaker/accessory bag - large

HC-1550 Custom traveling hard case

SS-250 Speaker stand

MSB-201 Mic stand w/ boom

SB-1 Stand mount\*

SB-3 Ceiling mount bracket\*


SB-360 360° swivel wall bracket\*

\* Available w/ black or white finish

### UHF WIRELESS:

WH-6000 Wireless Handheld Microphone/ Transmitter

WB-6000 Wireless Body-Pack Transmitter w/o Microphone. Mic Options Include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

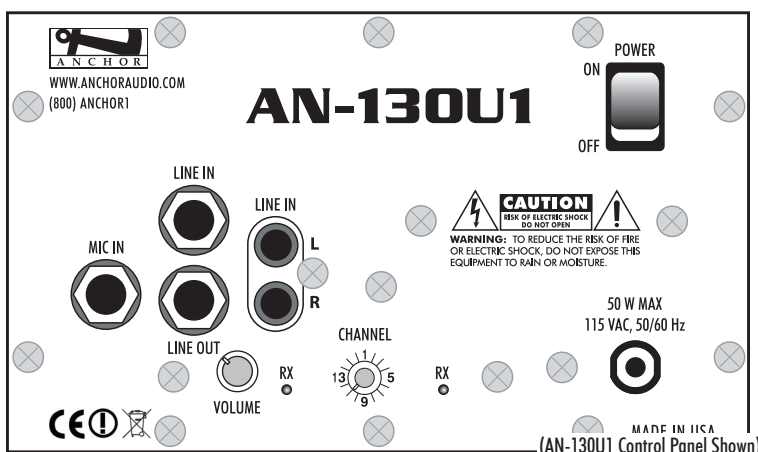

## AN-130 TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts
Max SPL @ Rated Power	101 dB @ 1 meter
Frequency Response	65 Hz – 18 kHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110 - 125 VAC, 50/60 Hz
Export Model	208 - 240 VAC, 50/60 Hz (50W max)
Fuse Rating	T 1.0A / 250V
Export Model	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm
Weight	8.5 lbs / 3.8 Kg

<b>Inputs</b>	
Line (2)	Hi-Z, unbalanced, RCA (summing L+R)
Microphone	Lo-Z, unbalanced, 1/4" phone
<b>Output</b>	
Line	Lo-Z, buffered, 1/4" phone
<b>Sensitivity For Rated Output</b>	
Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



**Anchor Audio, Inc.**

Portable Sound Systems • Torrance, California

**888/444-6077**

www.anchoraudio.com