

CLASSACT FEATURES

ClassACT Powered Monitor

Portable Speaker Monitor Specifications

Advancing Technology

The ClassACT (CA-130U1) is a light-weight, easy to use sound system that fills the classroom with your voice using a wireless microphone. With a hands free microphone you can make a presentation, write on a whiteboard or operate your projector without interrupting your presentation. Teachers, corporate presenters and training instructors can all use a ClassACT.



SAVE YOUR VOICE – QUIT YELLING – AND EVERYONE HEARS YOU WITH A CLASSACT

6-YEAR WARRANTY!

REACH CROWDS OF 100+

101 DB OF CLEAR SOUND FROM 30 WATT AMPLIFIER

ANCHOR WIRELESS RECEIVER & MICROPHONE
W/ 16 USER-SELECTABLE CHANNELS

EVEN SOUND DISTRIBUTION INSURES EVERYONE
IN ATTENDANCE CAN HEAR YOU

MAGNETICALLY SHIELDED SPEAKER FOR AV USE

“DAISY-CHAIN” SECOND SPEAKER FOR LARGER ROOMS

REMOTE CONTROL FOR VOLUME & MUTE

CONTROLLED WIRELESS ANTENNA RANGE KEEPS
THE AUDIO IN THE ROOM

UNIT CAN BE MOUNTED ON A WALL, CEILING OR
SPEAKER STAND

DURABLE INJECTION-MOLDED POLYPROPYLENE CASE

LIGHTWEIGHT WEIGHS JUST 8.5 POUNDS

MADE IN THE USA!

CLASSACT ACCESSORIES

REMOTE-130 Infrared remote control

MIC-90P Professional dynamic, cardioid pattern handheld microphone

CC-100 Speaker/accessory bag

CC-100XL Speaker/accessory bag - large

HC-1550 Custom traveling hard case

SS-250 Speaker stand

MSB-201 Mic stand w/ boom

SB-1 Stand mount*

SB-3 Ceiling mount bracket*


SB-360 360° swivel wall bracket*

* Available w/ black or white finish

UHF WIRELESS:

WH-6000 Wireless Handheld Microphone/Transmitter

WB-6000 Wireless Body-Pack Transmitter w/o Microphone. Mic Options Include:
Over-the-Ear/EM-60T, Lapel/LM-60,
Collar/CM-60, Headband/HBM-60

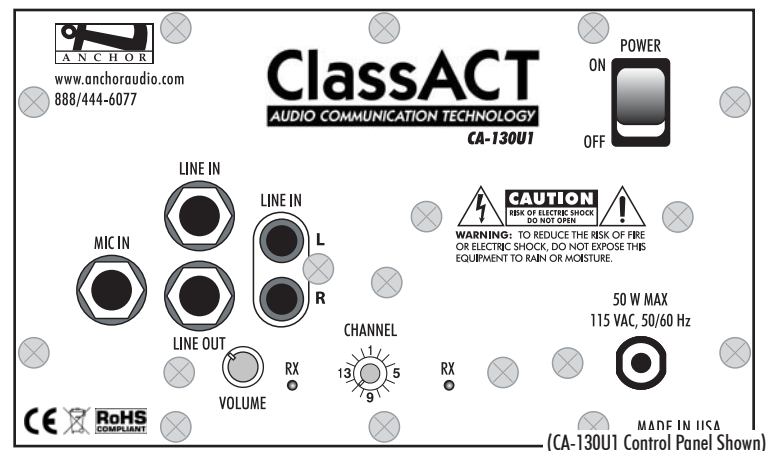

CLASSACT TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts
Max SPL @ Rated Power	101 dB @ 1 meter
Wireless Antenna Range	30 feet / 9.14 meter
Frequency Response	65 Hz – 18 kHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110 - 125 VAC, 50/60 Hz
Export Model	208 - 240 VAC, 50/60 Hz-50W max
Fuse Rating	T 1.0A / 250V
Export Model	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm
Weight	8.5 lbs / 3.8 Kg

Inputs	
Line (2)	Hi-Z, unbalanced, RCA (summing L+R)
Microphone	Lo-Z, unbalanced, 1/4" phone
Output	
Line	Lo-Z, buffered, 1/4" phone
Sensitivity For Rated Output	
Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com

S-CA/0307