


TEL-A-Greeter™ 252

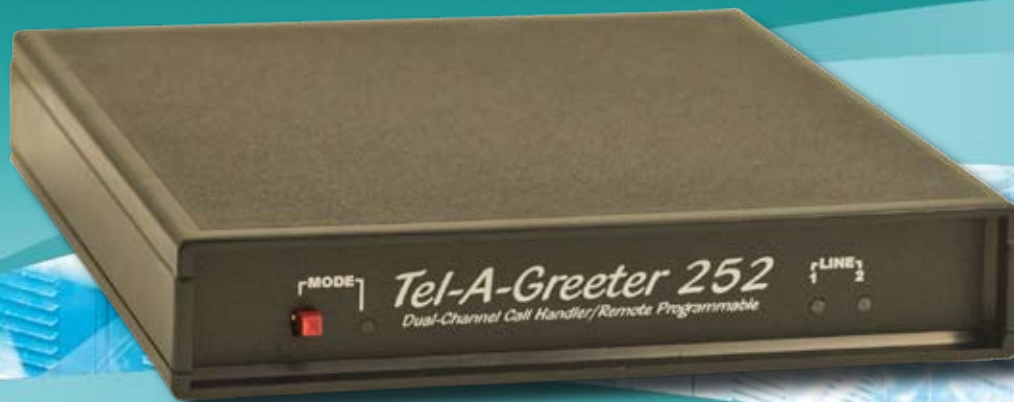

Call Screening • After Hours Answering • Movie & Attraction Times

Nel-Tech Labs Digital Messaging System

The Tel-A-Greeter™ 252 are advanced-technology digital call screening and messaging systems designed to answer calls with an informative greeting, then let callers ring through for live pickup, select other pre-recorded messages or hang-up. Available in two models the Tel-A-Greeter 251 is a single-line unit capable of handling a single incoming call while the 252 is a two-line unit capable of handling two calls simultaneously.

Message recording and system programming functions are accessed locally or remotely using a standard touch-tone telephone. A total of eleven messages can be recorded into each unit, these messages include eight menu messages, one day and one night greeting message, and one music-on-hold message. The music-on-hold message slot plays when a call is being transferred to local phone.

The Tel-A-Greeter 251 and 252 both have a Call-Screening option that allows callers to bypass the greeting message and ring through

if they have the correct password. This option could be used in applications where a business is closed but callers with the correct password would be able to ring-through to talk to after hour employees.

The Tel-A-Greeter features include:

- Plays MOH message while transferring call
- Separate day, night, and private messages
- Store up to 8 informational messages
- Local and remote programming capability
- Password security
- Flash memory
- 5-year parts and labor warranty
- Manufactured in the USA

Each Tel-A-Greeter is built to exacting quality standards using state-of-the-art SMT (surface mount) assembly for outstanding reliability and years of dependable service.




Specifications

Technical


Encoding μ Law
Frequency Response ... 300Hz to 3.5KHz
Sample Rate 64Kbps
Signal-to-Noise >50dB
Memory Type High-density FLASH
Memory Capacity 8 minutes
Message Capacity 11 variable-length
Number of lines 2
Message Loading Local or remote telephone

Message Playback Triggered on pre-set amount of rings
Ringer Output 60 Volts (RMS), 20Hz
Required Line Balanced line tip & ring, 90 volt ring, loop start
Power 12VAC @ 850mA
Audio Output Telco jack (RJ-11)
Size 1.80" x 8.30" x 9.00" (H x W x D)
Color Black
Shipping Weight 3 pounds

Message Flow

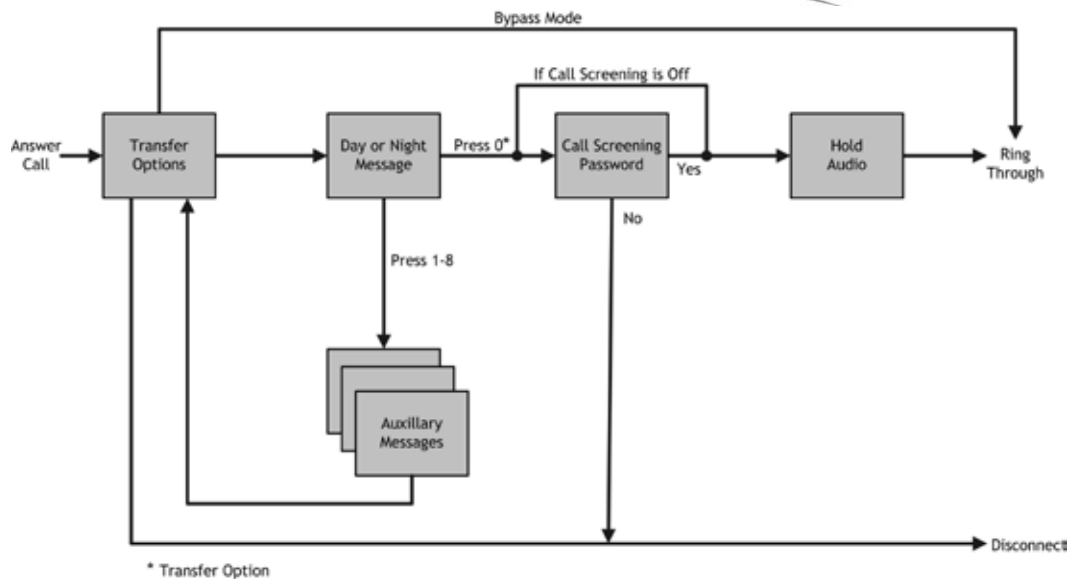

Back View

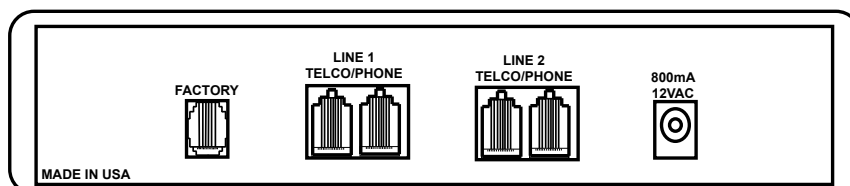

Nel-Tech Labs, Inc.

4 Ash Street Extension • Derry, NH 03038

800.344.4685 • 603.425.1096

www.nel-techlabs.com • sales@nel-techlabs.com